

MARS 4 SERIES

THERMAL SMART HD RIFLE SCOPES



640 1-8x
384 1.25-5x



640 1.5-15x
384 2-8x





640 2.5-20x
384 4.5-18x



640 4-40x
384 7-28x



IMAGE QUALITY

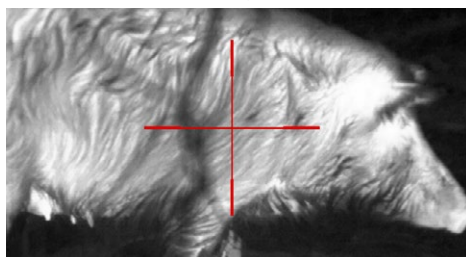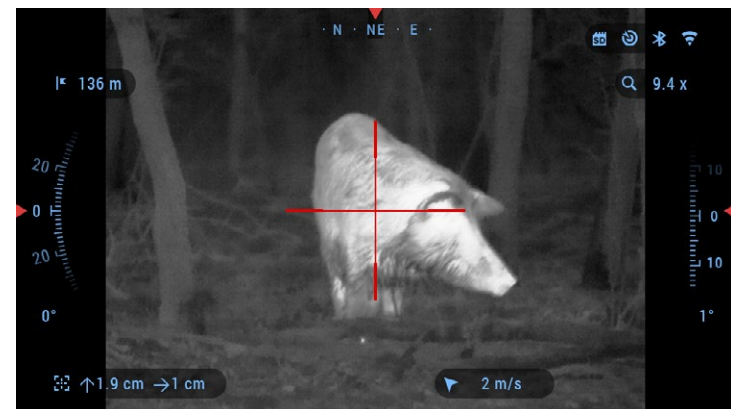

By combining Cutting-Edge thermal technology with our Dual Core Processor, we are able to deliver unsurpassed image quality. Giving the end user a visual experience like no other.

- BALLISTIC CALCULATOR
- RECOIL ACTIVATED VIDEO (RAV)
- SMART RANGE FINDER

- E-COMPASS
- DUAL CORE PROCESSOR
- SHARE ON SOCIAL MEDIA

- ONE SHOT ZERO
- ULTRA LOW POWER CONSUMPTION
- PROFILE MANAGER


RECORD VIDEO



BALLISTIC CALCULATOR



DUAL STREAM VIDEO

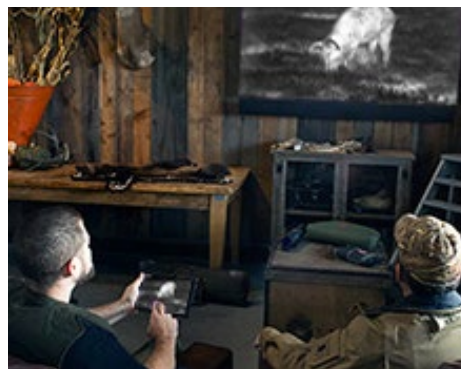

OPTIONAL ACCESSORIES



ATN QUICK DETACH MOUNT



ATN X-TRAC REMOTE CONTROL



AUXILIARY BALLISTIC LASER RANGEFINDER SERIES

SPECIFICATIONS

	MARS 4 384 1.25-5x	MARS 4 384 2-8x	MARS 4 384 4.5-18x	MARS 4 384 7-28x	MARS 4 640 1-8x	MARS 4 640 1.5-15x	MARS 4 640 2.5-20x	MARS 4 640 4-40x
Item #	MS4K3819	MS4K3825	MS4K3850	MS4K3875	MS4K6419	MS4K6425	MS4K6450	MS4K6475
Sensor	Gen 4 384x288				Gen 4 640x480			
Magnification	1.25-5x	2-8x	4.5-18x	7-28x	1-10x	1.5-15x	2.5-25x	4-40x
Field of view	16°x12.5°	12°x9.5°	6°x4.7°	3°x2.4°	32°x25°	24°x19°	12.5°x9.7°	6°x4.7°
Core	ATN Obsidian IV Dual Core T							
Micro Display	1280x720 HD Display							
Eye relief	90 mm							
Video Record Resolution	1280x960 @ 30/60 fps							
Ballistic Calculator	Yes							
WiFi (Streaming, Gallery, & Controls)	iOS & Android							
Bluetooth	Yes							
3D Gyroscope	Yes							
3D Accelerometer	Yes							
E-Barometer	Yes							
Smart Range Finder	Yes							
RAV (Recoil Activated Video)	Yes							
Electronic Compass	Yes							
Smooth Zoom	Yes							
Reticles	Multiple Patterns & Color Options							
Microphone	Yes							
Micro SD card	From 4 to 64 Gb							
Micro USB, type C	Yes							
Mount	30 mm Standard Rings (included)							
Internal Lithium Ion Battery	18+ hrs				16+ hrs			
Waterproof rating / IP rating	Weather resistant							
Dimensions	13.1"×3"×3"	13.5"×3"×3"	13.8"×3"×3"	14.8"×3"×3"	13.1"×3"×3"	13.5"×3"×3"	13.8"×3"×3"	14.8"×3"×3"
	332×76×76 mm	343×76×76 mm	351×76×76 mm	375×176×76 mm	332×76×76 mm	343×76×76 mm	351×76×76 mm	375×176×76 mm
Weight	1.93 lb / 0.88 kg	2.03 lb / 0.92 kg	2.2 lb / 1.0 kg	2.35 lb / 1.06 kg	1.93 lb / 0.88 kg	2.03 lb / 0.92 kg	2.2 lb / 1.0 kg	2.35 lb / 1.06 kg
Warranty	2 years							
Human Detection Range	750 m	960 m	1800 m	3000 m	830 m	1050 m	1950 m	3300 m
Human Recognition Range	335 m	480 m	720 m	1320 m	350 m	530 m	800 m	1450 m
Human Identification Range	205 m	300 m	430 m	720 m	225 m	330 m	475 m	800 m

* Specifications subject to change without notice